


Instructions; Honda TRX-450R Front Lowering Kit


Part Number 20-1008

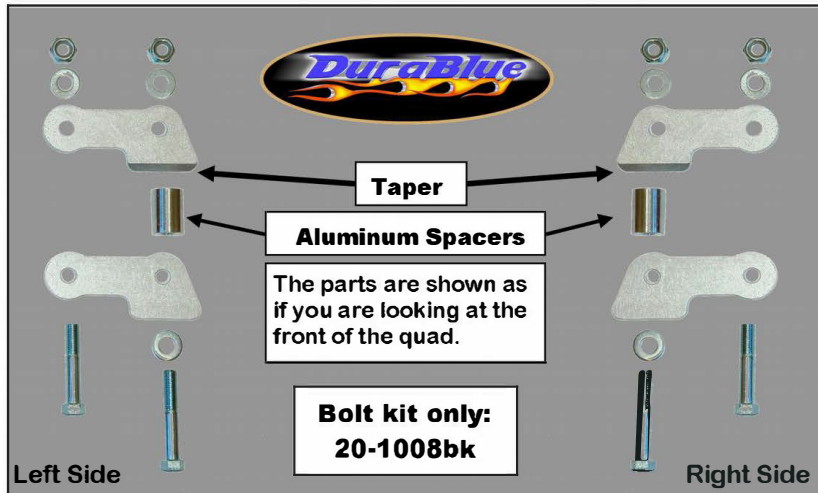

Note: Make sure you have received a complete kit. The picture (top left) shows all the parts and how they go together.

1) Raise the front end of the quad so the front wheels are off the ground.

Front left side shock mount.

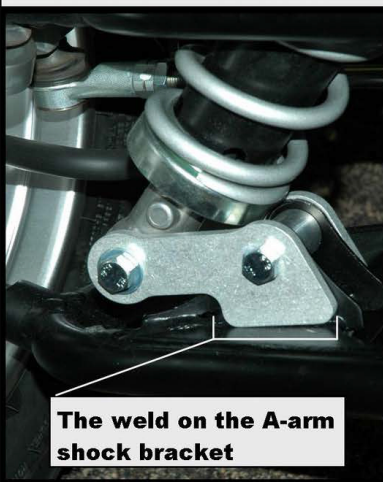

2) Remove the bottom bolt that holds the shock in place.

Note: All four lowering kit plates has a taper on one side. The taper goes against the weld. Lowering kit plates are a left right orientation! Note: Typical installation as shown.

Front right side shock mount.



3) Start your installation with the placement of the aluminum spacer in the shock bracket on the A-arm. Place the two lowering kit plates on the outside of the shock bracket with the taper against the weld. Put a washer on the bolt and run your bolt through. Put a washer on the bolt and put your nut on hand tight. 4) Align the shock on the lower mounting holes and put your bolt through the holes. Put on a washer and then the nut. Now tighten both nuts on the upper and lower part of the lowering kit. Torque to 40 ft. lbs., plus or minus 3 lbs. 5) Repeat the same process on the other side.

This is how your lowering kit should look when you're done! ► Bounce front up & down, check for binding!

Note: The front lowering kit is designed for flat track or ice racing. This kit is not recommended for jumping.

