



UNIVERSAL HELMET LOCK

4232

FITS: ANY 1-1/4" TO 1-1/2" ROUND TUBE

PARTS INCLUDED

- 1 Universal Helmet Lock assembly
- 2 Keys on ring
- 2 Tamper-proof screws
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

PLEASE NOTE

It is the installers' responsibility to make sure all fasteners (including pre-assembled) are tightened before operation of motorcycle. Kuryakyn will not warranty components that are lost due to improper installation. Periodic maintenance may be required.

ATTENTION! Test fit the helmet lock location before fully tightening the tamper-proof screws. It is extremely difficult to remove the screws.

WARNING! AVOID LOSS OF CONTROL, DAMAGE AND SERIOUS INJURY OR DEATH. DO NOT OPERATE THE MOTORCYCLE WITH THE HELMET LOCKED INTO THE UNIVERSAL HELMET LOCK.

TOOLS SUGGESTED

Flat blade screwdriver.

PROCEDURE

STEP 1 Park the motorcycle on a hard, level surface; turn off the ignition and allow the engine to cool.

STEP 2 Test fit the helmet lock on the motorcycle to ensure that the helmet will not damage or interfere with any other components on your motorcycle. Do not install the tamper-proof screws at this time.


NOTE It is very important to perform the "test-fit" due to the extreme difficulty in removing the tamper-proof screws after they are tightened.

ATTENTION! Ensure clearance of painted surfaces that could be damaged by a helmet or hot surfaces that could cause damage to your helmet.

STEP 3 Insert the tamper-proof screws through the front side of the helmet lock as shown in [PIC.1](#).

STEP 4 Tighten screws evenly and ensure that the helmet lock is properly clamped onto the tube.

-cont.-

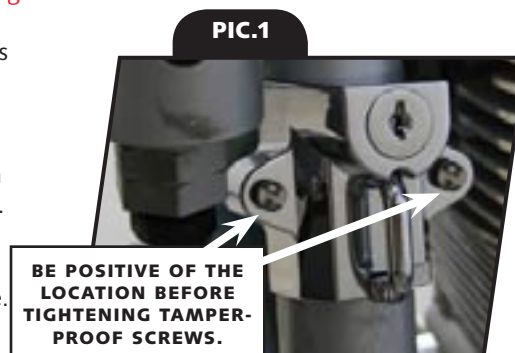

LOCK OPERATION

STEP 1 Insert key into lock; turn clockwise to open latch.

STEP 2 Loop helmet strap over the lock latch; shut the latch.

STEP 3 Turn the key counter-clockwise and remove the key to lock the latch.

STEP 4 Repeat Step 1 to remove helmet.

Ride On!

Kuryakyn

PAGE

2

UNIVERSAL HELMET LOCK **INSTALLATION**