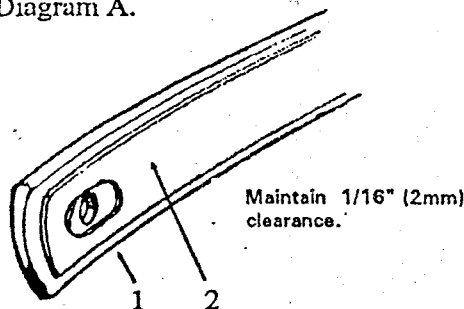
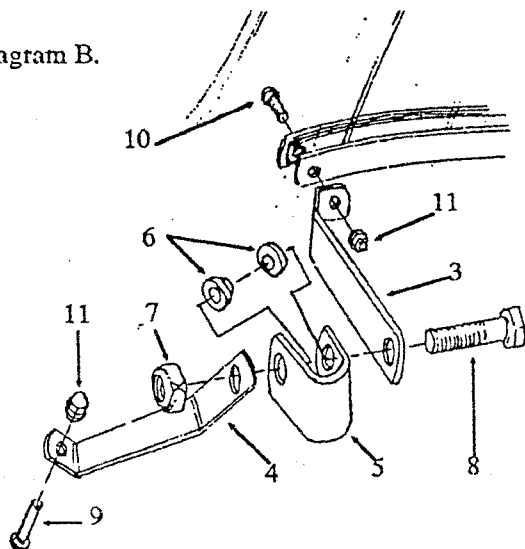
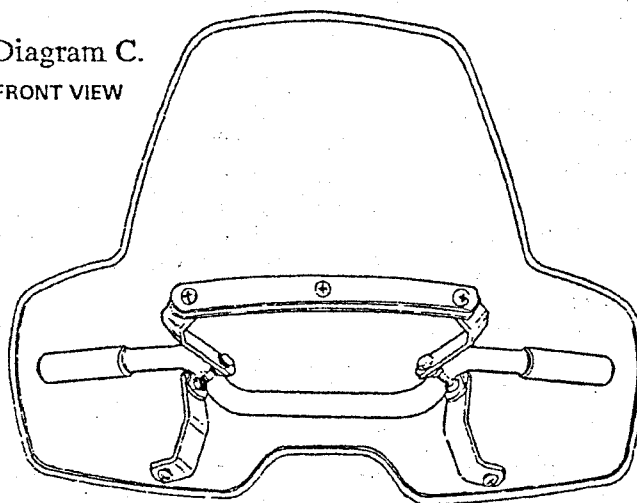


**Diagram A.**

**Diagram B.**

**Diagram C.  
FRONT VIEW**


Install lower bracket using 1/2" Phillip Screw

**PARTS LIST**

Loose In Kit

Index No.	Part No.	Description	Qty.
1	30-310620	HORIZONTAL FRAME	2
2	75-763210	FRAME GASKET	2
3	37-376100	UPPER BRACKET	2
4	37-376110	LOWER BRACKET	2

**Bag No. 195**

5	37-410110	U CLAMP 7/8" (22.2mm)	2
6	49-493110	WASHER BEVEL	4
7	42-432010	NUT 3/8"-16	2
8	50-500101	BOLT 3/8" 16X2"	2
9	55-580000	PHILLIP SCREW 1/4-20X1/2"	3
10	55-580100	PHILLIP SCREW 1/4-20X3/4"	2
11	42-480000	CAP NUT, 1/4"-20	5

**TOOLS LIST:**

7/16" crescent wrench, and Phillips screw driver.

**NOTE:** Please report any missing parts to your dealer or directly to National Cycle. The following information is necessary: bag number and serial number located on outside of plastic bag and place of purchase.

**INSTALLING MECHANICS:**

*Pass instruction manual onto customer.* This contains vital information about the use, adjustments, and maintenance of the product. It also contains important cautionary and warning information.

This manual is designed for complete product knowledge; parts identification, installation, precautions, and maintenance. Please take the time to become familiar with your ATV windshield to obtain the best results in use.

**INSTALLATION PROCEDURE**

1. Apply 1 piece of gasket to the inside curvature of one horizontal strip, and 1 gasket to outside curvature of other strip. Maintain a 1/16" (2mm) clearance around all edges. Diagram A.

2. Using a 1/2" Phillip screw and cap nut attach the inside and outside horizontal strips to the windshield at the center hole location. The gasket is placed against plastic of windshield.

3. Position the upper brackets to the outside holes of the horizontal strip as shown in Diagram B and install with 3/4" Phillip screws and cap nuts.

4. Using the 1/2" Phillip screws install the lower brackets to inside of windshield as in Diagram B and C.

5. Install the windshield to the ATV using the 2" hex bolt, "U" clamps, bevel washers and 3/8"-16 nut. Diagram B and C.

**NOTE:** Certain applications may require slight bending of the brackets or a variation of assembly shown.

## **WARNING**

National Cycle windshields and fairings are designed to provide wind protection and increased riding comfort, but not protection in the event of a collision with another vehicle, the road, birds, or any other object.

Our products utilize certain features, patented and otherwise, that may minimize injury in certain accidents, but the possibility of injury exists if the screen is broken or if impacted by an object.

Always wear eye protection, helmets and protective clothing. Never ride your ATV while under the influence of drugs or alcohol.

All of our products are made in conformance and exceed the requirements of D.O.T. SS205, Z26.1, classifications AS6 and AS7, which covers all safety glazing for motorcycle / ATV application.

*Never ride your ATV with loose windshield mounting hardware. Check the hardware for tightness regularly.*

If the addition of an accessory(ies) adversely affects your ATV's stability, immediately remove the accessory(ies). Do not ride an ATV that exhibits unsafe handling traits. Have experienced service personnel correct any problem before riding with the accessory(ies) installed. For further questions concerning handling problems associated with an accessory(ies), contact your dealer, vehicle manufacturer, or accessory manufacturer.

## **MAINTENANCE**

To clean the screen, wash with a clean soft cloth, plenty of warm water and, if necessary, a non-abrasive soap such as dishwashing liquid. Flannel or soft chamois make good cleaning cloths. Apply a high quality plastic polish, such as McGuir's Mirror-Glaze MGH-17, to the clean screen. Remove grease or glue residue with naphtha or turpentine.

Do not clean windshield with glass cleaners. Do not use rain protective products on the screen. Do not allow brake fluid, alcohol, or strong solvents to contact the screen.