

Prime® Orange Compatible Antifreeze/Coolant

Antifreeze/Coolant PN: AF3400 & AF3500

[Overview](#) | [Instructions](#) | [Technology](#) | [Video](#)

Flush and Fill:

DRAIN the cooling system to remove loose rust and sediment from the radiator. Follow owner's manual (ILLUS. 1a).

FLUSH the system using a quality product like Prestone® Flush and Cleaner to clean the engine block (ILLUS. 2a).

FILL with Prime® Orange Compatible Antifreeze/Coolant and distilled water to achieve the freeze-up/boil-over protection indicated on the back of the bottle (ILLUS. 3a).



Top-off:

For Vehicles with Expansion Tank:

REMOVE pressure cap **WITH THE ENGINE COLD**.

FILL tank with Prime® Orange Compatible 50/50 Prediluted Antifreeze/Coolant to "cold" fill line.


REPLACE cap securely* (ILLUS. 1b).

For Vehicles with Recovery Bottle and Pressure Cap on Radiator:

REMOVE radiator cap **WITH THE ENGINE COLD**.

ADD Prime® Orange Compatible 50/50 Prediluted Antifreeze/Coolant to within one inch of the top of the radiator cap.

TOP OFF recovery bottle to "cold" fill line* (ILLUS. 2b).

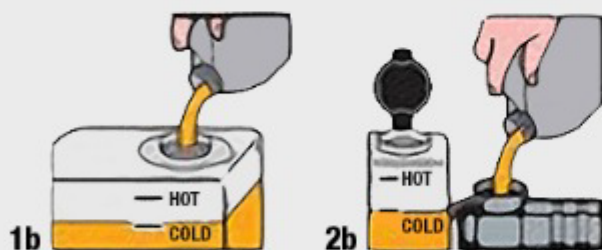

*Check fluid level after 1-2 days. If consistency is low, have cooling system checked for leaks.

WARNING: DO NOT drink antifreeze or solution. Do not store in open or unlabeled containers. Avoid contact with eye, skin and clothing. Wash thoroughly after handling. Avoid breathing vapors or mist. Solution is poisonous to animals.

IF SWALLOWED, CALLED A POISON CENTER OR GO TO A HOSPITAL EMERGENCY ROOM IMMEDIATELY. If inhaled, move to fresh air. Seek medical attention if symptoms persist. In case of contact wash with water.

KEEP OF REACH OF CHILDREN AND PETS.

When it comes to quality auto repair parts, Prestone is the brand you can depend on.