



Jeep Wrangler 7" Headlight Installation Instructions

Congratulations on your purchase of a high quality PUTCO product.

Please read all instructions before installation and to check to see that all parts are included.

KIT CONTENTS:	
Description	Qty.
Driver Side Light	1
Passenger Side Light	1
Adaptor Harness	2

Tools Needed

- flat head screw driver
- Torx Head Socket

Bumper Grille Installation

1. Remove bumper grille from packaging. Check to see if all parts from above table are included.
2. Remove grille from jeep by removing 6 plastic fasteners from top of grill, removing marker light harnesses, and pulling straight out on grille.
3. Remove factory headlights by removing 4 Torx head screws and retaining ring around each headlight. Unplug headlight. (Set retaining ring and screw aside, these will be used to reinstall Putco headlights)
4. If jeep requires H13 bulbs, adaptor harness will need to be installed into factory harness before light is installed.
5. Install New light into jeep by plugging in light into harness, using factory retaining ring and screws. Driver side light will be installed in the orientation shown in Figure 1. Passenger side will be in the opposite orientation.

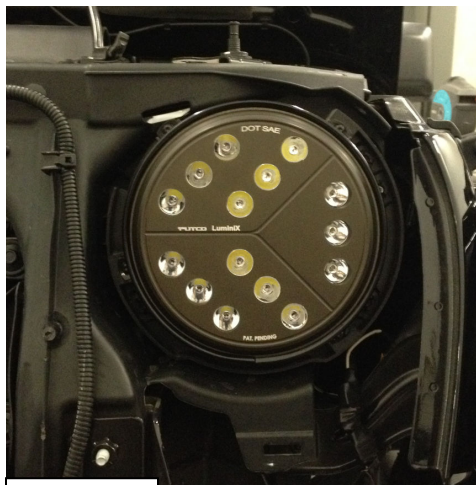


Figure 1