


OWNER'S MANUAL

**2,500 LB**  
(1,250 LB / RAMP)  
**QUADLITE XTREME**  
**ARCH RAMPS**  
(Model Number 565148)

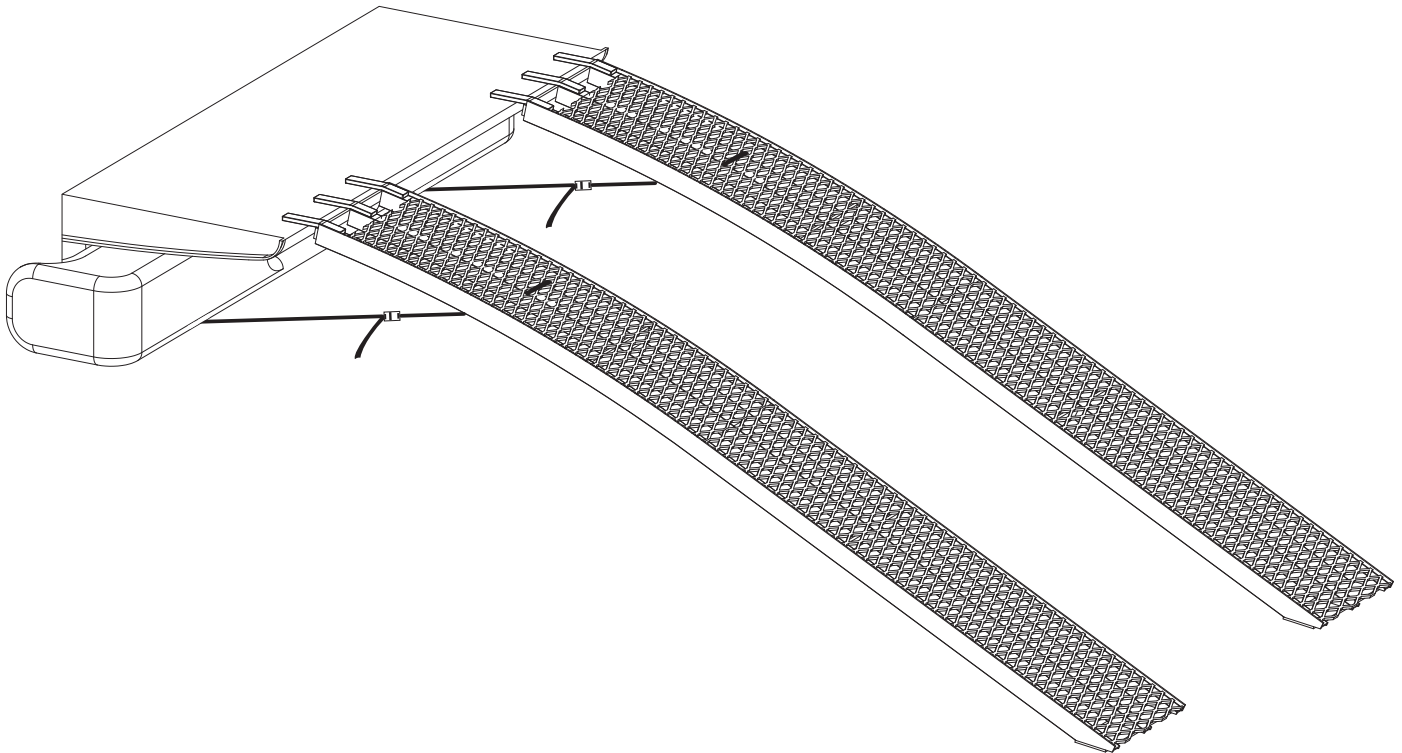

## **⚠ WARNING**

**DO NOT USE ON SOFT SURFACES OR UNLEVEL TERRAIN.**

**REAR ENGINE EQUIPMENT SHOULD BE LOADED IN REVERSE TO AVOID FRONT END REAR-UP.**

**DO NOT EXCEED THE CAPACITY OF YOUR LOADING SURFACE (I.E. TAILGATE, BUMPER). IF UNKNOWN, CONSULT THE MANUFACTURER TO FIND LOAD CAPACITIES.**

**IF LOADING OR UNLOADING FROM A TRAILER, MAKE SURE THE TRAILER IS PROPERLY COUPLED TO THE TOW VEHICLE.**

**NEVER STAND IN THE PATH OF EQUIPMENT WHEN LOADING/ UNLOADING WITH THE RAMP, AND KEEP BYSTANDERS AWAY FROM THE RAMPS.**

**DO NOT STEP BETWEEN RUNGS. THIS MAY CAUSE A PERSON TO FALL THROUGH AND POSSIBLY RESULT IN SERIOUS BODILY INJURY.**

**RAMPS ARE INTENDED FOR LOADING/UNLOADING EQUIPMENT ONTO A TRAILER OR PICKUP TRUCK. DO NOT USE RAMP SECTIONS AS A LADDER, BRIDGE, SCAFFOLDING, OR FOR ANY OTHER PURPOSE.**

### **ALWAYS...**

- Use on level ground and securely attach ramp to truck.
- Be careful of pinch points at ramp tab locations while securing ramp to tailgate.
- Use as 4-wheeled ATV or UTV ramp only.
- Inspect before each and every use to be sure there is no product damage or loose/missing bolts & hardware.

### **NEVER...**

- Exceed load capacity of 1,250 lbs per ramp (2,500 lbs total), evenly distributed over four wheels.
- Use a damaged ramp; replace with new
- Use while under the influence of alcohol or drugs.
- Load ATV/UTV on ramp with any gear on racks of ATV/UTV.
- Use with 2- or 3-wheeled vehicles.
- Use carelessly -- Think Safety!
- Use in slippery conditions.

### **REPLACEMENT COMPONENTS**

- A306 Rubber tab cover
- A677 Rubber tab cover, center
- 23017 Ramp strap, complete