



TRANSFORMER PASSENGER BOARDS for GL 1800

7006

PARTS INCLUDED

- 1 Left Transformer Passenger Board
- 1 Right Transformer Passenger Board
- 1 Rubber Replacement Kit Including:
 - 2 Rubber Arm Lower
 - 2 Rubber Arm Upper
 - 1 Tube of Adhesive Gel
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

TOOLS SUGGESTED

Set of Metric Hex Wrenches, Torque Wrench and Set of Metric Hex Sockets


STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

- STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let cool.
- STEP 2** Remove the stock footboards and mounts from the bike by removing the two fasteners shown in PIC 1 from each stock board. The stock hardware will be reused to install the Transformer boards.
- STEP 3** Determine the Left Transformer board from the Right. The swing arm on the board goes on the outside and swings up/forward. Install the Transformer boards using the stock mounting hardware from Step 2. **Tighten to 20 ft/lbs.**

NOTE: Replacement rubbers have been provided just in case you lose one. Make certain the surface that the glue needs to adhere to is clean and ruffed up so rubber pad will stick.

CAUTION! The folding arm is intended as a footrest and is not intended to be used for mounting or dismounting the motorcycle, or to support the full weight of the passenger.

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not issue a warranty on components lost due to improper installation.

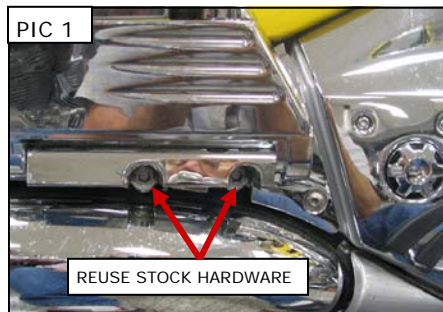

Ride On!